
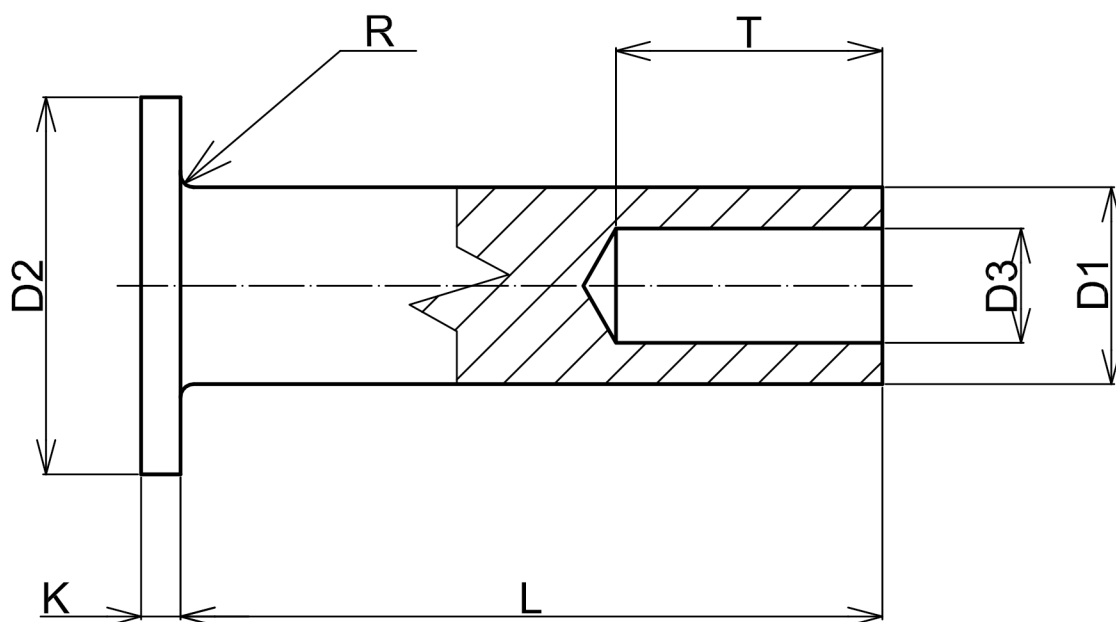




D1 min.	D2	R max.	K $\begin{smallmatrix} +0 \\ -0,2 \end{smallmatrix}$	Lmax.	D3 H13	T $\begin{smallmatrix} +0,5 \\ -0 \end{smallmatrix}$	
						1)	2)
2,85	5,5 h_{14}	0,2	0,8	60	1,7	3,5	4
3,8	7,5	0,3	1	60	2,7	4	5
4,8	9,5	0,3	1	60	3,5	4	6
5,8	11,5 h_{15}	0,4	1,2	60	4,2	6	8
7,75	15,5	0,4	1,2	60	6	8	10

Struktura povrchu:  Ra 1,8		Hrany:  -0,3  +0,3		Měřítko	Přesnost ISO2768-mH
Materiál		Polotovar		Hmotnost kg	Tolerování ISO8015
					Promítání 
		Druh dokumentu	VÝKRES SOUČÁSTI	Název	CHRÁNĚNO PODLE ISO 16016
		Kreslil RADIM NÁVRAT		NÝT DIN 7338 - TYP B	
		Schválil JIŘÍ NĚMČIK			
		Datum vydání 2012-07-18			
					Číslo dokumentu 1V00110
					List