
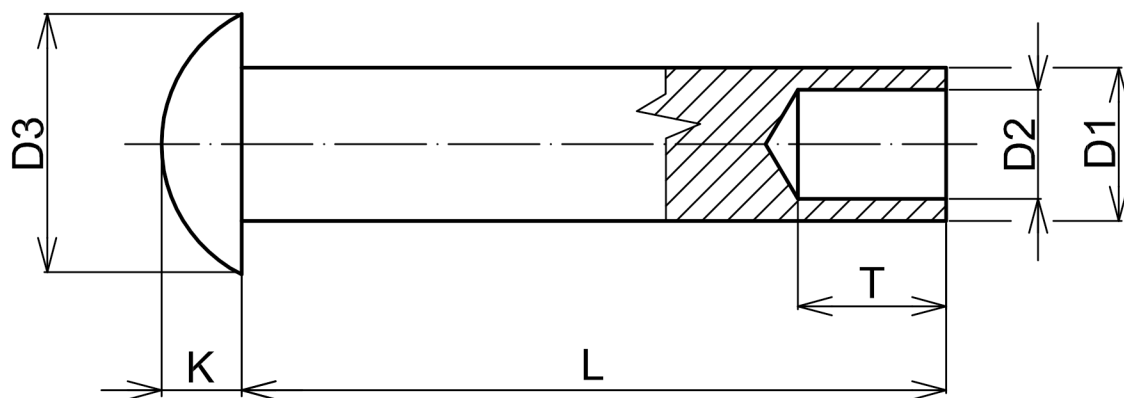





Ø	D1	D2	D3	K	Lmax.	T
2	1,9 ^{+0,05} ₋₀	1,25 ^{+0,05} _{-0,05}	3,8 ⁺⁰ _{-0,3}	1 ^{+0,1} _{-0,1}	45 ^{+0,3} ₋₀	2,5 ^{+0,5} ₋₀
3	2,8 ^{+0,05} ₋₀	2 ⁺⁰ _{-0,05}	4,7 ⁺⁰ _{-0,3}	1,2 ^{+0,1} _{-0,1}	45 ^{+0,3} ₋₀	3 ^{+0,5} ₋₀
4	3,8 ^{+0,05} ₋₀	2,7 ⁺⁰ _{-0,05}	7 ⁺⁰ _{-0,3}	1,6 ^{+0,3} ₋₀	45 ^{+0,3} ₋₀	4 ^{+0,5} ₋₀
5	4,8 ^{+0,05} ₋₀	3,5 ⁺⁰ _{-0,1}	8,8 ⁺⁰ _{-0,3}	2 ^{+0,3} ₋₀	65 ^{+0,3} ₋₀	5 ^{+0,5} ₋₀
6	5,8 ^{+0,1} ₋₀	4,3 ⁺⁰ _{-0,1}	10 ⁺⁰ _{-0,3}	2,5 ^{+0,3} ₋₀	65 ^{+0,3} ₋₀	6 ^{+0,5} ₋₀
7	6,8 ^{+0,1} ₋₀	5 ⁺⁰ _{-0,1}	12 ⁺⁰ _{-0,3}	3 ^{+0,3} ₋₀	65 ^{+0,4} ₋₀	6,5 ^{+0,5} ₋₀
8	7,8 ^{+0,1} ₋₀	5,5 ⁺⁰ _{-0,1}	14 ⁺⁰ _{-0,3}	3 ^{+0,3} ₋₀	65 ^{+0,4} ₋₀	6,5 ^{+0,5} ₋₀

Struktura povrchu: Ra 1,8		Hrany: 		Měřítko 1,5:1	Přesnost ISO2768-mH Tolerování ISO8015 Promítání 
Materiál EN 10016-2		Polotovár Druh dokumentu VÝKRES SOUČÁSTI	Hmotnost kg Název	CHRÁNĚNO PODLE ISO 16016 POLODUTÝ NÝT - DIN 6791	
	Kreslil RADIM NÁVRAT		Číslo dokumentu 38 List		
	Schválil				
	Datum vydání 2009-06-10				